

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
22 September 2005 (22.09.2005)

PCT

(10) International Publication Number  
**WO 2005/088181 A1**

(51) International Patent Classification: **F16L 3/24**

(21) International Application Number:  
PCT/AU2005/000343

(22) International Filing Date: 12 March 2005 (12.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2004901265 12 March 2004 (12.03.2004) AU

(71) Applicant and

(72) Inventor: **RABANIN, Raymond** [AU/AU]; Unit 9, 132  
Somerville Road, Hampton Park, VIC 3976 (AU).

(74) Agent: **SHANKS, David, Harry**; Suite 72, 189 Beacons-  
field Parade, Middle Park, VIC 3206 (AU).

(81) Designated States (*unless otherwise indicated, for every  
kind of national protection available*): AE, AG, AL, AM,


AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ,  
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,  
ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every  
kind of regional protection available*): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,  
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,  
GQ, GW, ML, MR, NE, SN, TD, TG).

Published:  
— with international search report

[Continued on next page]

(54) Title: SECURING ELEMENTS TO PIPES OR TUBES

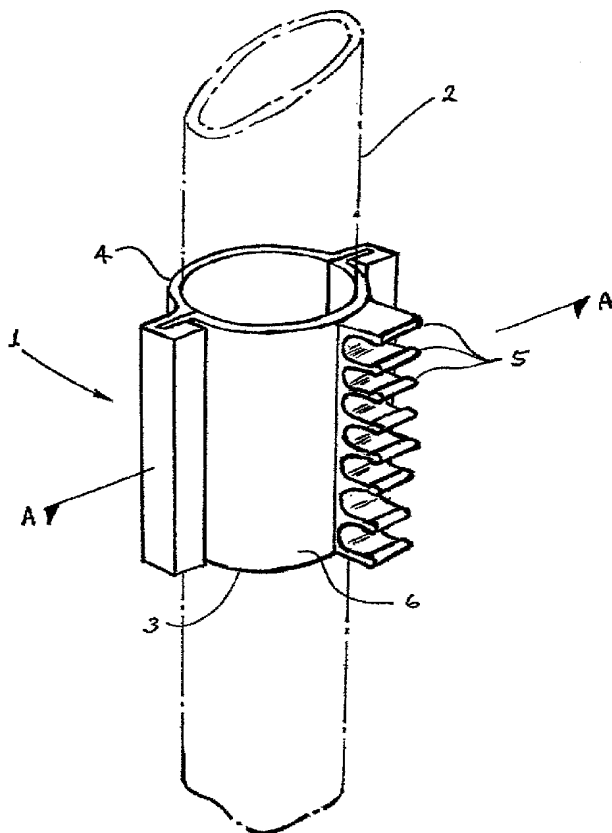

(57) Abstract: The invention provides a securing device (1) for securing items to an elongate element (2). The securing device comprises first and second parts (3, 4) positionable in co-operating engagement with each other and adjacent to the elongate element. The two parts when in engagement with each other are movable relative to each other in a longitudinal direction of the elongate element. The two parts are shaped so that this relative movement generates lateral relative movement of the two parts towards each other so that the elongate member is gripped between the parts. The invention permits rapid securing of items to elongate elements such as tubes. A particular application provides a cable support for use on tubular scaffolding. In its preferred form the cable support is a device as above and having spaced fingers (5) on one of the two parts, between which cables (7) can be inserted, retained and supported.



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*